



# Thin Coved Skirting

<b>Product description</b>	Unglazed, fully vitrified, chip proof ceramic skirtings with high breaking strength. Matching internal and external angles. Available in 62 colours from the Global Collection assortment as well as 12 colours from the Softline assortment.				
<b>Product advantages</b>	The thickness of this concave skirting, also known as 'sanitary skirting' is the same as Mosa 15 x 15 cm wall tiles, making fixing and maintenance simpler relative to traditional (thicker) skirtings.				
<b>Application</b>	By using the thin coved skirting and the matching internal and external angles as a transition between tiled walls and floors you create a rounded corner which is easy to clean. No dirt or dust traps possible because internal and external angles are available in the same thickness. The dimensions of the thin coved skirting are, including joint, 15 cm wide so it matches exactly with modular wall tiles of 15 x 15 cm. The new height of sight of 7.5 cm provides a neat clean transition from the 15 x 15 cm tiles. The use of these thin hollow skirtings is highly recommended in the following areas: - bakeries - fruit and vegetable processing - catering - supermarkets - slaughterhouses and butchers - processing and trade of fish - food processing - dairy production and processing - breweries - changing and shower rooms				
<b>Product specification</b>	<b>Dimensions, product codes, colour codes and price groups</b>				
	Modular size in cm incl. 4 mm joint	Production size in mm	Product code	Colour code	Price group
	7.5 x 15	75 x 146 x 5.5	DP7515	74000-74320 75020-76660	D 38 D 38
	7.5 x 2	75 x 20 x 5.5	DI7502	74000-74320 75020-76660	D 60 D 60
	7.5 x 2	75 x 20 x 5.5	DU7502	74000-74320 75020-76660	D 60 D 60
	• Recommended joint for modular system is 4 mm. • The unglazed thin hollow skirting dimensions are an exact match with Mosa Ultragres modular wall and floor tiles.				
	<b>Shades</b> Tiles are a natural product. Minor shade differences may occur. Mosa sorts products according shade which is printed on the box.				
<b>Technical data</b>	Product norm	EN 14411 Bla			
	Length and width	+/- 0.3%			
	Water absorption	< 0.05%			
	Frost resistance	Resistant			
	Chemical resistance	Class UA & UHA			
<b>Installation instruction</b>	The skirtings and angles can be installed together with wall tiles.				
<b>Relevant Technical product sheets</b>	Ultragres Fully Vitrified Unglazed Ultragres Slip-resistant				
<b>Maintenance</b>	Please consult Mosa documentation or <a href="http://www.mosa.nl">www.mosa.nl</a>				
<b>Sampling</b>	<a href="mailto:showroomservice@mosa.nl">showroomservice@mosa.nl</a> Tel: +31 (0)43 368 93 23				
<b>General inquiries</b>	International Service Desk: <a href="mailto:servicedesk@mosa.nl">servicedesk@mosa.nl</a> Tel: +31 (0)43 368 92 29; Fax: +31 (0)43 368 93 56				

# Thin Coved Skirting

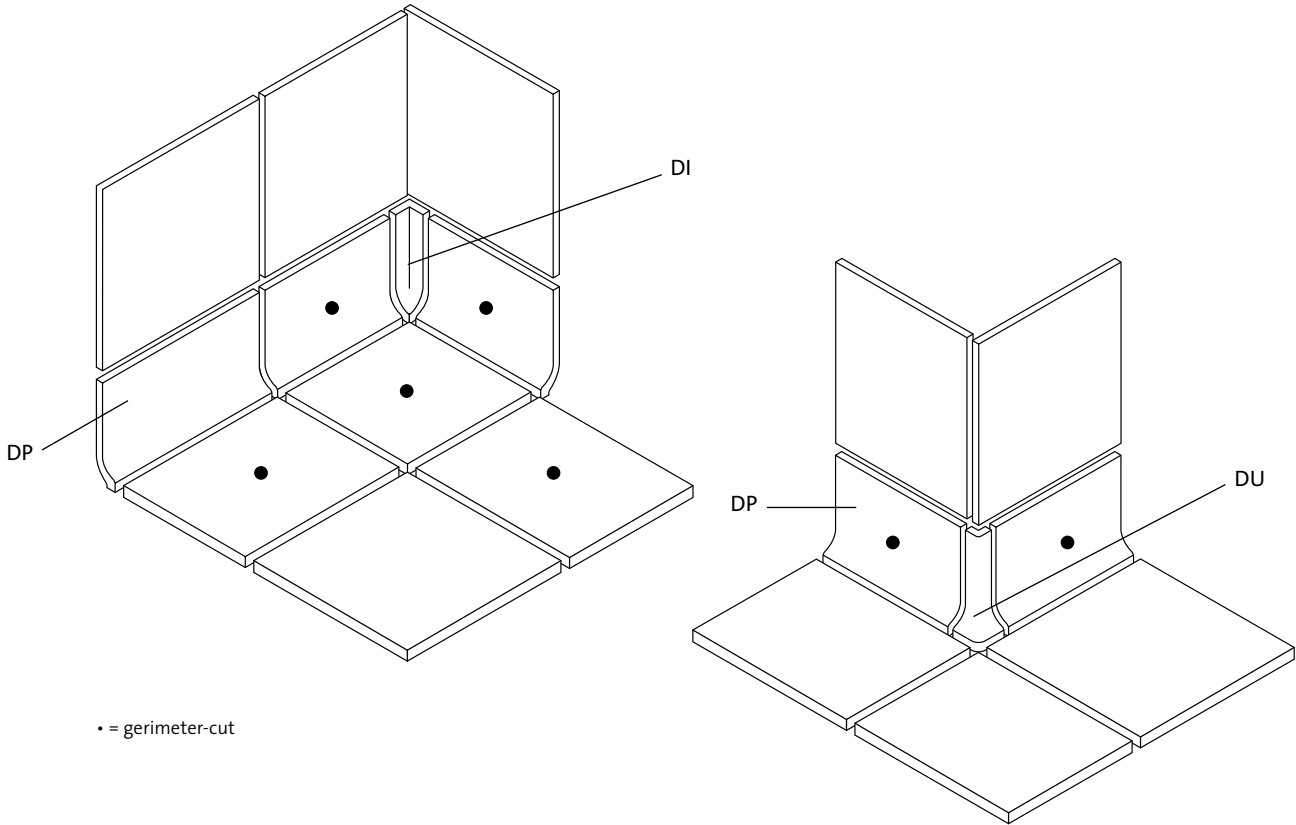

• = gerimeter-cut

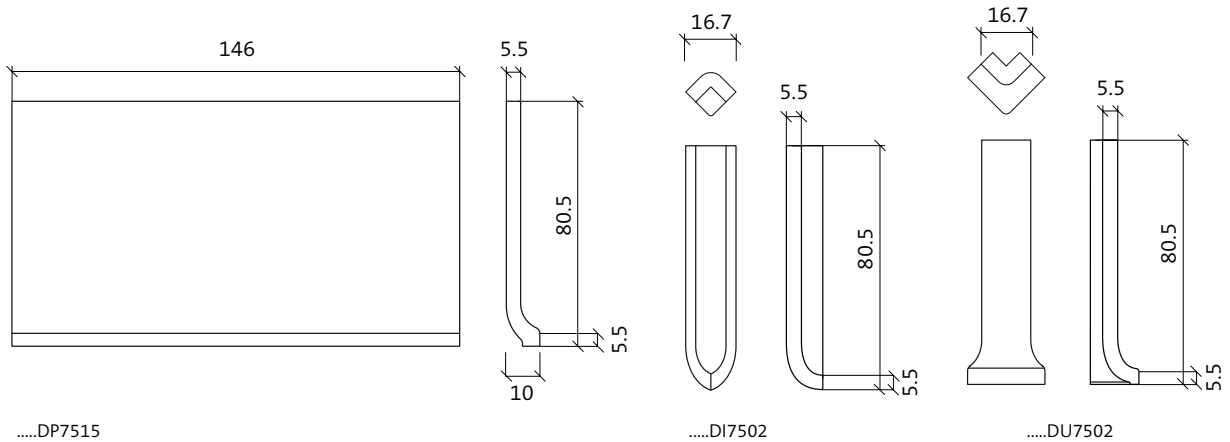

The text for this Technical product sheet replaces all preceding versions and has been composed with the utmost care and in cooperation with the leading mortar and adhesive producers. All recommendations are based on current state-of-the-art knowledge. This Technical product sheet contains information about Mosa products, properties and applications, and therefore may not to be used as a guarantee for the stated recommendations. Mosa will not be held responsible should this information be used as a guarantee. For warranties and liability we refer to our General Terms and Conditions of Sale. No rights can be derived from the contents of this Technical product sheet. Errors and price alterations excepted. For the most actual version see [www.mosa.nl](http://www.mosa.nl).



**Royal Mosa**

Meerssenerweg 358  
 P.O. Box 1026  
 NL-6201 BA Maastricht - The Netherlands  
 T +31 (0)43 368 92 29  
 F +31 (0)43 368 93 56  
[servicedesk@mosa.nl](mailto:servicedesk@mosa.nl)  
[www.mosa.nl](http://www.mosa.nl)



QUALITY ASSURED FIRM  
**ISO 9001**